




tagitron[®] IPRO "SkyPatch" UHF Antenna

tagitron[®] GmbH
Franz-Kleine Str.17
D - 33154 Salzkotten
Germany

Telefon : +49 (0) 5258 9866 0
Telefax: +49 (0) 5258 9866 44
Internet: <http://www.tagitron.com>
Email: info@tagitron.com

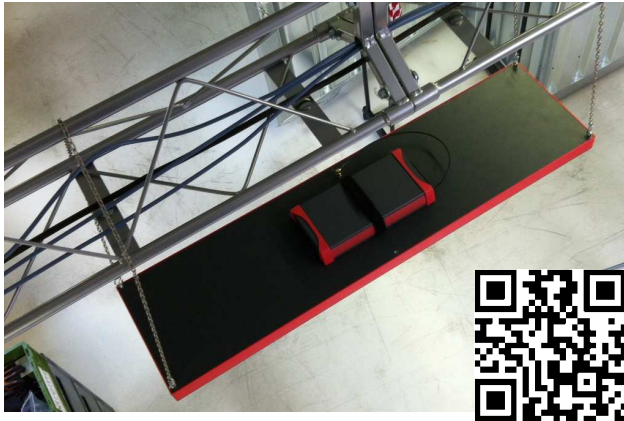

Description*:

tagitron[®] IPRO "SkyPatch" offers world leading high-performance in vertical RFID UHF reading, designed for indoor and outdoor applications.

Specification:

- IP 68 molded antenna housing
- Plug-and-Play Installation in combination with IPRO "BlackBox"
- easy and fast system implementation

Application range:

- indoor and outdoor applications
- harsh environmental applications
- logistics & automotive
- Smart-Shelves & Smart-Displays
- inventory
- access control

* subject to change without prior notice

Technical Data*

Type	SkyPatch 900
Frequency:	902-928 MHz (FCC; NA, SA) 865.6-867.6 MHz (ETSI; EU) 865-867 MHz (MCIT; India) 917-920.8 MHz (KCC)
Polarization	circular
Beam width	20° short side 80° long side
Antenna gain	up to 12 dBi @ 866 MHz
Impedance	50 Ω
VSWR	< 1.2:1
Connection	1 x SMA
Chemicals	IP 68
Weight	2500g
Dimensions (W x H x D)	900mm x 300mm x 40mm
Operating Temp.	-20C to +55C
Storage Temp.	-40C to +85C